


ATIBD50

Roof flashing 25°-50° (corrugated roofing)

Dachdurchführung 25°-50° für Pfannendach

Solin de toit 25°-50° toiture ondulée

Dakplaat 25°-50° pannendak

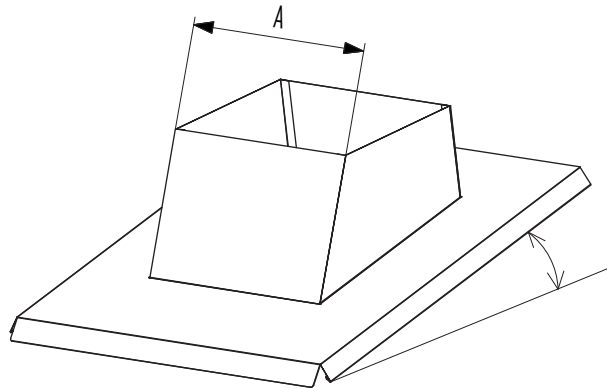

Ø	130	150	180	200
A	365	365	430	430