

# Declaration of Performance $\text{CE}$

## No. 102-DoP-2020-01-25

1. Unique identification code of the product-type: **Twin walled metal flue liners and connecting flue pipes with insulation Metaloterm<sup>®</sup> AD according to EN 1856-2:2009**
2. Intended use: **Convey the products of combustion from heating appliances to the chimney**
3. Product designations:
- |         |               |                            |
|---------|---------------|----------------------------|
| Model 1 | DN (130–300)  | T600 H1 D V2 L50050 O50 M  |
|         | DN (350–450)  | T600 H1 D V2 L50050 O75 M  |
|         | DN (500–600)  | T600 H1 D V2 L50060 O100 M |
|         | DN (700)      | T600 H1 D V2 L50060 O200 M |
|         | DN (800-1000) | T600 H1 D V2 L50080 O200 M |
| Model 2 | DN (130–300)  | T600 N1 D V2 L50050 G50 M  |
|         | DN (350–450)  | T600 N1 D V2 L50050 G75 M  |
|         | DN (500–600)  | T600 N1 D V2 L50060 G100 M |
|         | DN (700)      | T600 N1 D V2 L50060 G200 M |
|         | DN (800-1000) | T600 N1 D V2 L50080 G200 M |
4. Manufacturer: **Schiedel Metaloterm B.V.  
Oude Veerseweg 23  
4332 SH Middelburg  
The Netherlands**
5. Authorised representative: **N/A**
6. System(s) of AVCP: **System 2+ and System 4**
7. Harmonized standard: **EN 1856-2:2009**
- Notified body: **TÜV SÜD Industrie Service GmbH,  
Westendstrasse 199, 80686 Munich, Germany**  
Notified certification body for factory production control No. **0036** performed the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of conformity of the factory production control No. **0036-CPR-91418-102**.

## 8. Declared performance

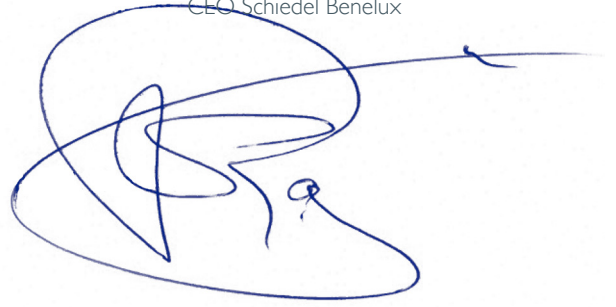
	Essential Characteristics	Performance	Harmonized technical specification
8.1	Compressive strength  Chimney sections, fittings and supports	Sections and fittings: Model 1 to 2 DN (130- 300): up to 30 m Model 1 to 2 DN (350- 450): up to 14 m Model 1 to 2 DN (500- 600): up to 12 m Model 1 to 2 DN (700-1000): up to 9 m Supports: n.p.d. For further information see <a href="http://www.metaloterm.com">www.metaloterm.com</a>	EN 1856-2:2009
8.2	Resistance to fire	(Resistance to fire from inside to outside) Model 1 DN (130- 300): T600 – O50 M Model 1 DN (350- 450): T600 – O75 M Model 1 DN (500- 600): T600 – O100 M Model 1 DN (700-1000): T600 – O200 M Model 2 DN (130- 300): T600 – G50 M Model 2 DN (350- 450): T600 – G75 M Model 2 DN (500- 600): T600 – G100 M Model 2 DN (700-1000): T600 – G200 M Tested without cover, with back ventilated ceiling duct	EN 1856-2:2009
8.3	Gas tightness/leakage	Model 1 DN (130-1000): H1 Model 2 DN (130-1000): N1	EN 1856-2:2009
8.4	Flow resistance of chimney sections fittings and terminals	According to EN 13384-1	EN 1856-2:2009
8.5	Thermal resistance	Model 1 to 2 DN (130-1000): 0,51 m <sup>2</sup> K/W tested at 200°C	EN 1856-2:2009
8.6	Thermal shock resistance Sootfire resistance	Model 1 DN (130-1000): No* Model 2 DN (130-1000): Yes * because designated O	EN 1856-2:2009
8.7	Thermal performance under normal operating conditions	Model 1 DN (130-1000): T600 Model 2 DN (130-1000): T600	
8.8	Flexural tensile strength (only for means of connection for chimney sections and fittings)	Model 1 to 2 DN (130- 300): up to 5 m Model 1 to 2 DN (350- 450): up to 5 m Model 1 to 2 DN (500- 600): up to 5 m Model 1 to 2 DN (700-1000): n.p.d.	EN 1856-2:2009
8.9	Non vertical installation	Model 1 to 2 DN (130-1000): Maximum offset between supports 3 m at 90° (inclined run, maximum distance between two fixations, supports at non vertical installation)	EN 1856-2:2009
8.10	Components subject to wind load	Model 1 to 2 DN (130- 600): Free standing height 3 m above last support Maximum spacing between lateral supports: 4 m Model 1 to 2 DN (700-1000): Free standing height 1,5 m above last support Maximum spacing between lateral supports: 4 m	EN 1856-2:2009
8.11	Durability: Water and vapour diffusion resistance	No	
8.12	Condensate penetration resistance	Model 1 to 2 DN (130-1000): No	EN 1856-2:2009
8.13	Against corrosion	Model 1 to 2 DN (130-1000): V2	
8.14	Freeze thaw resistance	Model 1 to 2 DN (130-1000): Yes	

9. The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Middelburg, 2020-01-25

Drs. Simon J. Ramaekers  
CEO Schiedel Benelux

A handwritten signature in blue ink, consisting of several overlapping loops and a long horizontal stroke extending to the right.